


PRODUCT INFORMATION



Application Type	Luminn inground lights
Housing Type	Die Cast Aluminum, SS Ring
Colour Temperature	3500K, 6500k, 2700K, 3000K, 4000K, 6000K
Dimmable	Yes
Controls	Analog, Dali, On/off
Driver	Inbuilt / Remote
Wattage Upto	6W, 12W
Size	dia: 132mm, height: 155mm
Driver	Remote
Input Voltage	24V

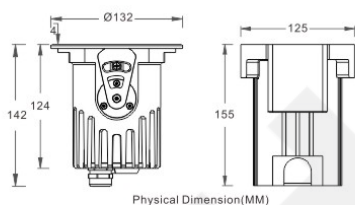

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
ET-8DA1320306	6W/8W	3PCS CREE SMD	2200-6500K RGBW/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/22°/15°/55°/20°/60°	AC220-240V AC110-240V AC220-240V	ON/OFF 7/18mS-10V ON/OFF
ET-8DA1320310A	10W	3PCS CREE SMD	2200-6500K RGBW/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/22°/15°/55°/20°/60°	AC220-240V	ON/OFF
ET-8DA1320310B	6-10W	3PCS CREE SMD	2200-6500K RGBW/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/22°/15°/55°/20°/60°	AC220-240V	ON/OFF
ET-8DA1320312A	6-12W	3PCS CREE SMD	2200-6500K RGBW/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/22°/15°/55°/20°/60°	AC220-240V	ON/OFF
ET-8DA1320309	6-9W	3PCS CREE SMD	2200-6500K RGBW/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/22°/15°/55°/20°/60°	AC220-240V	ON/OFF
ET-8DA1320312B	6-12W	3PCS CREE SMD	2200-6500K RGBW/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/22°/15°/55°/20°/60°	AC220-240V	ON/OFF
ET-8DA1320108	8W/10W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	AC220-240V AC110-240V DC24V/DC36V/DC48V	ON/OFF 7/18mS-10V ON/OFF (PWM) 10-10V DALI DMX512
ET-8DA1320112	6-12W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	AC220-240V AC110-240V DC24V/DC36V/DC48V	ON/OFF 7/18mS-10V ON/OFF (PWM) 10-10V DALI DMX512