


### PRODUCT INFORMATION



<b>Application Type</b>	Luminn inground lights
<b>Housing Type</b>	Die Cast Aluminum
<b>Colour Temperature</b>	3500K, 6500k, 2700K, 3000K, 4000K, 6000K
<b>Dimmable</b>	Yes
<b>Controls</b>	Analog, Dali, On/off
<b>Wattage Upto</b>	3W, 5W
<b>Size</b>	163X74mm, height: 112mm
<b>Driver</b>	Inbuilt, Remote

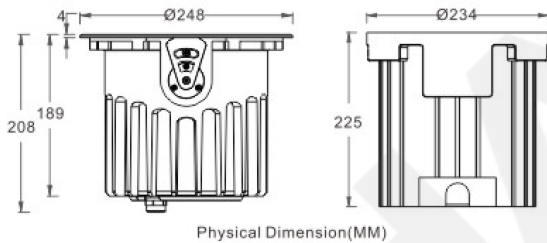

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
ET-BDA2481842	42W /48W/54W	18PCS CREE SMD	2200-6500K RGB/Y/A	5°/8°/10°/12°/20° /28°/30°/40°/45° /60°/100°/22° /15°/55°/200°/60°	AC110-130V /AC110-240V	ON/OFF /Triac/0-10V/DALI
ET-BDA2481832	32W/42W	18PCS CREE SMD	2200-6500K RGB/Y/A	5°/8°/10°/12°/20° /28°/30°/40°/45° /60°/100°/22° /15°/55°/200°/60°	AC220-240V DC24V/DC36V /DC48V	ON/OFF /Triac ON/OFF /PWM/Trip /0-10V/DALI/DMX512
ET-BDA2481854A	42-54W	18PCS TYANSHINE SMD	Turnable White 2700K/6500K		DC24V	PWM/DALI/DMX512
ET-BDA2481854B	42-54W	18PCS TYANSHINE SMD	RGB 3in1	25°/40°/60°	DC24V	PWM/DMX512
ET-BDA2481854C	42-54W	18PCS TYANSHINE SMD	RGBW 4in1 (R: 2700K/6500K/20000K G: 2700K/6500K/20000K B: 2700K/6500K/20000K W: 2700K/6500K/20000K)		DC24V /AC110-240V	PWM/DMX512 /DMX-RDM
ET-BDA2481860C	42-60W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	AC200-240V /AC110-135V /AC110-240V	ON/OFF /Triac/0-10V/DALI
ET-BDA2480142	42W/48W/54W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	DC24V/DC48V	ON/OFF /0-10V/DALI/DMX512
ET-BDA2480154	42-54W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	DC24V/DC48V	ON/OFF /0-10V/DALI/DMX512