


PRODUCT INFORMATION



Application Type	Luminn inground lights
Housing Type	Die Cast Aluminum, SS Ring
Colour Temperature	3500K, 6500k, 2700K, 3000K, 4000K, 6000K
Dimmable	Yes
Controls	Analog, Dali, On/off
Wattage Upto	18W, 30W
Size	dia: 182mm, height: 180mm
Driver	Remote
Input Voltage	24V

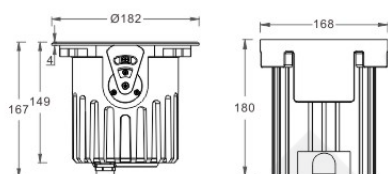

Physical Dimension(MM)

MODEL NO	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
ET-BDA1820924	24W	9PCS CREE SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12°/20°/25°/36°/40°/60°/80°/110°/122°/15°/55°/20°/60°	AC220-240V AC110-240V AC110-120V	ON/OFF /Triac/0-10V/DALI ON/OFF /Triac
ET-BDA1820930A	24-30W	9PCS CREE SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12°/20°/25°/36°/40°/60°/80°/110°/122°/15°/55°/20°/60°	AC110-240V AC110-120V	ON/OFF /Triac/0-10V/DALI
ET-BDA1820930B	24-30W	9PCS CREE SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12°/20°/25°/36°/40°/60°/80°/110°/122°/15°/55°/20°/60°	AC110-240V AC110-120V	ON/OFF /Triac/0-10V/DALI
ET-BDA1820930C	24-30W	9PCS CREE SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12°/20°/25°/36°/40°/60°/80°/110°/122°/15°/55°/20°/60°	AC110-240V AC110-120V	ON/OFF /Triac/0-10V/DALI
ET-BDA1820930D	24-30W	9PCS CREE SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12°/20°/25°/36°/40°/60°/80°/110°/122°/15°/55°/20°/60°	AC110-240V AC110-120V	ON/OFF /Triac/0-10V/DALI
ET-BDA1820118	18-24W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	AC220-240V AC110-240V AC110-120V	ON/OFF /Triac/0-10V/DALI ON/OFF /Triac
ET-BDA1820120	20W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	AC220-240V AC110-240V AC110-120V	ON/OFF /Triac/0-10V/DALI ON/OFF /Triac
ET-BDA1820124	24-30W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	AC220-240V AC110-240V AC110-120V	ON/OFF /Triac/0-10V/DALI ON/OFF /Triac