


PRODUCT INFORMATION



- Application Type** Luminn inground lights
- Housing Type** Die Cast Aluminum, SS Ring
- Colour Temperature** 3500K, 6500k, 2700K, 3000K, 4000K, 6000K
- Dimmable** Yes
- Controls** Analog, Dali, On/off
- Wattage Upto** 18W, 30W
- Size** dia: 182mm, height: 180mm
- Driver** Inbuilt, Remote

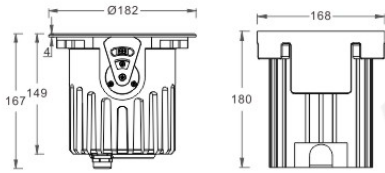

Physical Dimension(MM)

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
ET-BDA1820924	24W	9PCS CREE SMD	2200-6500K RGB/Y/A	5°/8°/10°/12°/20°/28°/30°/40°/45°/60°/10°/22°/15°/55°/20°/60°	AC220-240V AC110-240V AC115-120V	ON/OFF /Triac/0-10V/DALI
ET-BDA1820918	18W	9PCS CREE SMD	2200-6500K RGB/Y/A	5°/8°/10°/12°/20°/28°/30°/40°/45°/60°/10°/22°/15°/55°/20°/60°	AC110-240V AC115-120V	ON/OFF /Triac
ET-BDA1820930A	24-30W	9PCS CREE SMD	2200-6500K RGB/Y/A	5°/8°/10°/12°/20°/28°/30°/40°/45°/60°/10°/22°/15°/55°/20°/60°	AC110-240V AC115-120V	ON/OFF /Triac
ET-BDA1820930B	24-30W	9PCS CREE SMD	2200-6500K RGB/Y/A	5°/8°/10°/12°/20°/28°/30°/40°/45°/60°/10°/22°/15°/55°/20°/60°	AC110-240V AC115-120V	ON/OFF /Triac
ET-BDA1820930C	24-30W	9PCS TYANSHINE SMD	Turnable White 2700K-6500K	25°/40°/60°	DC 12V/DC24V DC36V/DC48V	PWM/DALI/DMX512
ET-BDA1820930D	24-30W	9PCS TYANSHINE SMD	RGB 3in1 RGBW 4in1 (W:2700K/3000K/6500K/8000K)	25°/40°/60°	DC 12V/DC24V DC36V/DC48V	PWM/DMX512
ET-BDA1820118	18-24W	1PCS CREE COB	2700K-6500K	15°/24°/38°/60° (Lens)	AC220-240V AC110-240V	ON/OFF /Triac/0-10V/DALI
ET-BDA1820120	20W	1PCS CREE COB	2700K-6500K	15°/24°/38°/60° (Lens)	AC110-120V	ON/OFF /Triac
ET-BDA1820124	24-30W	1PCS CREE COB	2700K-6500K	15°/24°/38°/60° (Lens)	DC24V/DC36V /DC48V	ON/OFF /0-10V/DALI/DMX512