


PRODUCT INFORMATION



Application Type	Luminn inground lights
Housing Type	Die Cast Aluminum
Housing Colour	Grey
Colour Temperature	3500K, 6500k, 2700K, 3000K, 4000K, 6000K
Dimmable	Yes
Controls	Analog, Dali, On/off
Wattage Upto	3W, 5W
Size	dia: 208mm, height: 201mm
Driver	Remote
Input Voltage	24V

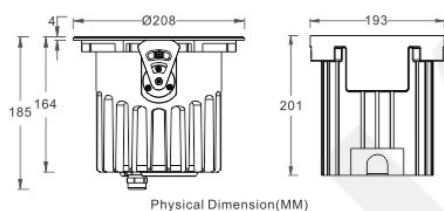

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
ET-BDA2081236	36W-42W	12PCS CREE SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/70°/80°/90°	AC220-240V AC110-240V	ON/OFF /Triac0-10V/DALI
ET-BDA2081242A	36W-42W	12PCS CREE SMD	Turnable White 2700K/6500K	15°/24°/36°/60°	DC24V/DC36V /DC48V	ON/OFF (PWM/Tsac) 0-10V/DALI/DMX512
ET-BDA2081242B	36W-42W	12PCS TYANSHINE SMD	Turnable White 2700K/6500K	25°/40°/60°	DC24V/DC36V /DC48V	PWM/DMX512
ET-BDA2081242C	36W-42W	12PCS TYANSHINE SMD	RGB 3in1 (w/ 2700K/6500K/6500K/6500K/6500K)	25°/40°/60°	DC24V/DC36V /DC48V	PWM/DMX512 DMX-RGB
ET-BDA2081242D	36W-42W	12PCS TYANSHINE SMD	RGB 3in1 (w/ 2700K/6500K/6500K/6500K/6500K)	25°/40°/60°	DC24V/DC36V /DC48V	ON/OFF (PWM/Tsac) 0-10V/DALI
ET-BDA2080136	36W-42W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	AC220-240V AC110-240V DC24V/DC36V /DC48V	ON/OFF (PWM/Tsac) 0-10V/DALI/DMX512
ET-BDA2080142	36W-42W	1PCS CREE COB	2700K-6500K	15°/24°/36°/60° (Lens)	AC220-240V AC110-240V DC24V/DC36V /DC48V	ON/OFF (PWM/Tsac) 0-10V/DALI/DMX512