

PRODUCT INFORMATION



Application Type

Inground Lights,
Pathway Light

Housing Type


Die Cast Aluminum,
stainless steel

Colour Temperature

2700K, 3000K, 4000K

Dimmable

No

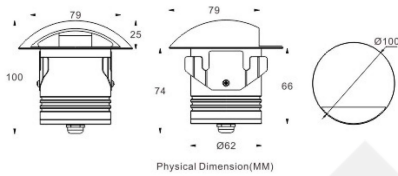

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	LIGHTING EFFECT	INPUT VOLT	CONTROL
DM-SIG1000107	7W/10W	1PCS LPISE TYANSHINE	3000K-5700K		AC220V-240V	ON/OFF Triac/0-10V
DM-SIG1000108	8W				DC24V	ON/OFF,0-10V/DALI Triac/0-10V/DMX512
DM-SIG1000105	5W		Tunable White 2700/6500K	1/2/3/4 Emitting Holes	DC12V/DC24V /DC36V/DC48V	DALI/DMX512
DM-SIG1000103	3W	1PCS TYANSHINE	RGB 3in1			
DM-SIG1000104	4W		RGBW 4in1 (0-100%0-100%0-100% 0-100%)		DC24V	DMX512

