



PRODUCT INFORMATION

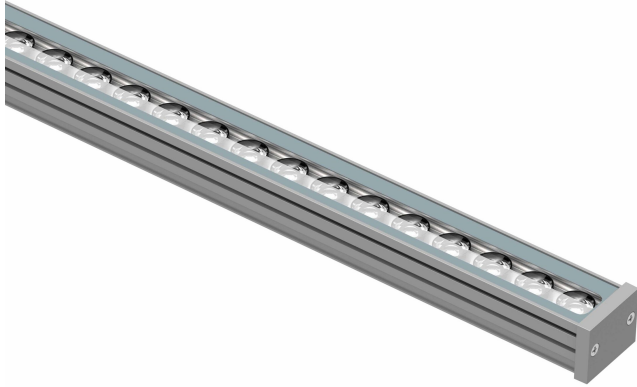

Application Type	Wall washer
Housing Type	aluminium extrusion
Housing Colour	Grey
Colour Temperature	5000K, 3000K, 4000K
Accessories	Light Shield
Dimmable	Yes
Controls	Analog, Dali, On/off
Driver	Remote

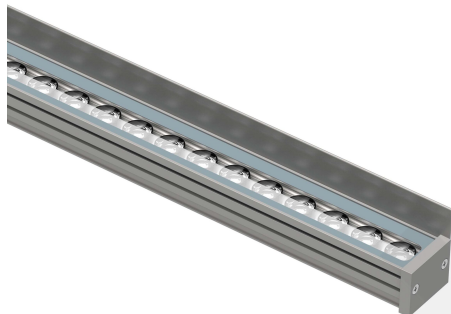


DC24V 3000 CRI 70 IP66 Single Color on/off 1

Model	LED Qty (pcs)	Power (w)	Length (mm)	CCT (K)	Luminous Flux (lm)	Beam Angle	Weight (kg)
L-528F-10.0009.020.XX.X1.050	9	9	500	3000/4000/5000	705/705/757	20°	0.8
L-528F-10.0009.2040.XX.X1.050	9	9	500	3000/4000/5000	705/705/757	20°*42°	0.8
L-528F-10.0012.020.XX.X1.050	12	12	500	3000/4000/5000	940/940/1009	20°	0.8
L-528F-10.0012.2040.XX.X1.050	12	12	500	3000/4000/5000	940/940/1009	20°*42°	0.8
L-528F-10.0018.020.XX.X1.100	18	18	1000	3000/4000/5000	1409/1409/1514	20°	1.6
L-528F-10.0018.2040.XX.X1.100	18	18	1000	3000/4000/5000	1409/1409/1514	20°*42°	1.6
L-528F-10.0024.020.XX.X1.100	24	24	1000	3000/4000/5000	1879/1879/2018	20°	1.6
L-528F-10.0024.2040.XX.X1.100	24	24	1000	3000/4000/5000	1879/1879/2018	20°*42°	1.6



Bracket 1:



Bracket 2:

