

Infree



LIGHT AND LIFE

# IN Z F R E E

Walk with light and shadow

Right now, I'm gonna start a game with you

An exploration of vision and light


[www.halomax.co.in](http://www.halomax.co.in)



#### Features







Ø21mm tube



Ø35mm tube

#### Combined Form





# INFREE SERIES



## PRODUCT SPECIFICATION



◦ CCT  
2700K/3000K/4000K  
5000K/6000K

◦ MATERIAL  
6063 Aluminum

◦ REFLECTOR  
Polycarbonate

◦ LUMEN OUTPUT  
---LM/W

◦ CRI  
≥Ra80/≥Ra90

◦ LIGHT TYPE  
SMD

◦ OPERATING VOLTAGE  
DC48V

◦ SURFACE COLOR  




| LIGHT MODEL      | POWER  | BEAM ANGLE | DIMENSIONS |
|------------------|--------|------------|------------|
| INFREE-D21-TF90  | 12-22W | 110°       | φ21*900mm  |
| INFREE-D21-TF120 | 18-30W | 110°       | φ21*1200mm |
| INFREE-D21-TF150 | 22-37W | 110°       | φ21*1500mm |



| LIGHT MODEL       | POWER  | BEAM ANGLE | DIMENSIONS |
|-------------------|--------|------------|------------|
| INFREE-D21-TF90A  | 12-22W | 90°        | φ21*900mm  |
| INFREE-D21-TF120A | 18-30W | 90°        | φ21*1200mm |
| INFREE-D21-TF150A | 22-37W | 90°        | φ21*1500mm |



| LIGHT MODEL       | POWER  | BEAM ANGLE | DIMENSIONS |
|-------------------|--------|------------|------------|
| INFREE-D21-TF90B  | 10W    | 90°        | φ21*900mm  |
| INFREE-D21-TF120B | 12W    | 90°        | φ21*1200mm |
| INFREE-D21-TF150B | 22-37W | 90°        | φ21*1500mm |



| LIGHT MODEL     | POWER | BEAM ANGLE  | DIMENSIONS |
|-----------------|-------|-------------|------------|
| INFREE-D21-TG60 | 12W   | 12°/24°/36° | φ21*600mm  |
| INFREE-D21-TG90 | 18W   | 12°/24°/36° | φ21*900mm  |



| LIGHT MODEL      | POWER | BEAM ANGLE  | DIMENSIONS |
|------------------|-------|-------------|------------|
| INFREE-D21-TG60A | 12W   | 12°/24°/36° | φ21*600mm  |
| INFREE-D21-TG90A | 18W   | 12°/24°/36° | φ21*900mm  |



# INFREE SERIES



## PRODUCT SPECIFICATION



◦ CCT  
2700K/3000K/4000K  
5000K/6000K

◦ MATERIAL  
6063 Aluminum

◦ REFLECTOR  
Polycarbonate

◦ LUMEN OUTPUT  
---LM/W

◦ CRI  
≥Ra80/≥Ra90


◦ LIGHT TYPE  
LED

◦ OPERATING VOLTAGE  
DC48V



◦ SURFACE COLOR  
■ ■




| LIGHT MODEL     | POWER | BEAM ANGLE | DIMENSIONS |
|-----------------|-------|------------|------------|
| INFREE-D21-G100 | 5-10W | 360°       | φ100*200mm |




| LIGHT MODEL    | POWER | BEAM ANGLE | DIMENSIONS |
|----------------|-------|------------|------------|
| INFREE-D21-S45 | 5-10W | 360°       | φ46*200mm  |

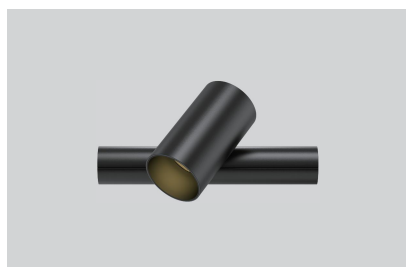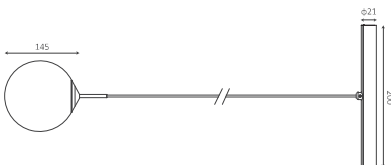

| LIGHT MODEL    | POWER | BEAM ANGLE  | DIMENSIONS |
|----------------|-------|-------------|------------|
| INFREE-D21-S45 | 5-10W | 12°/24°/36° | φ46*200mm  |



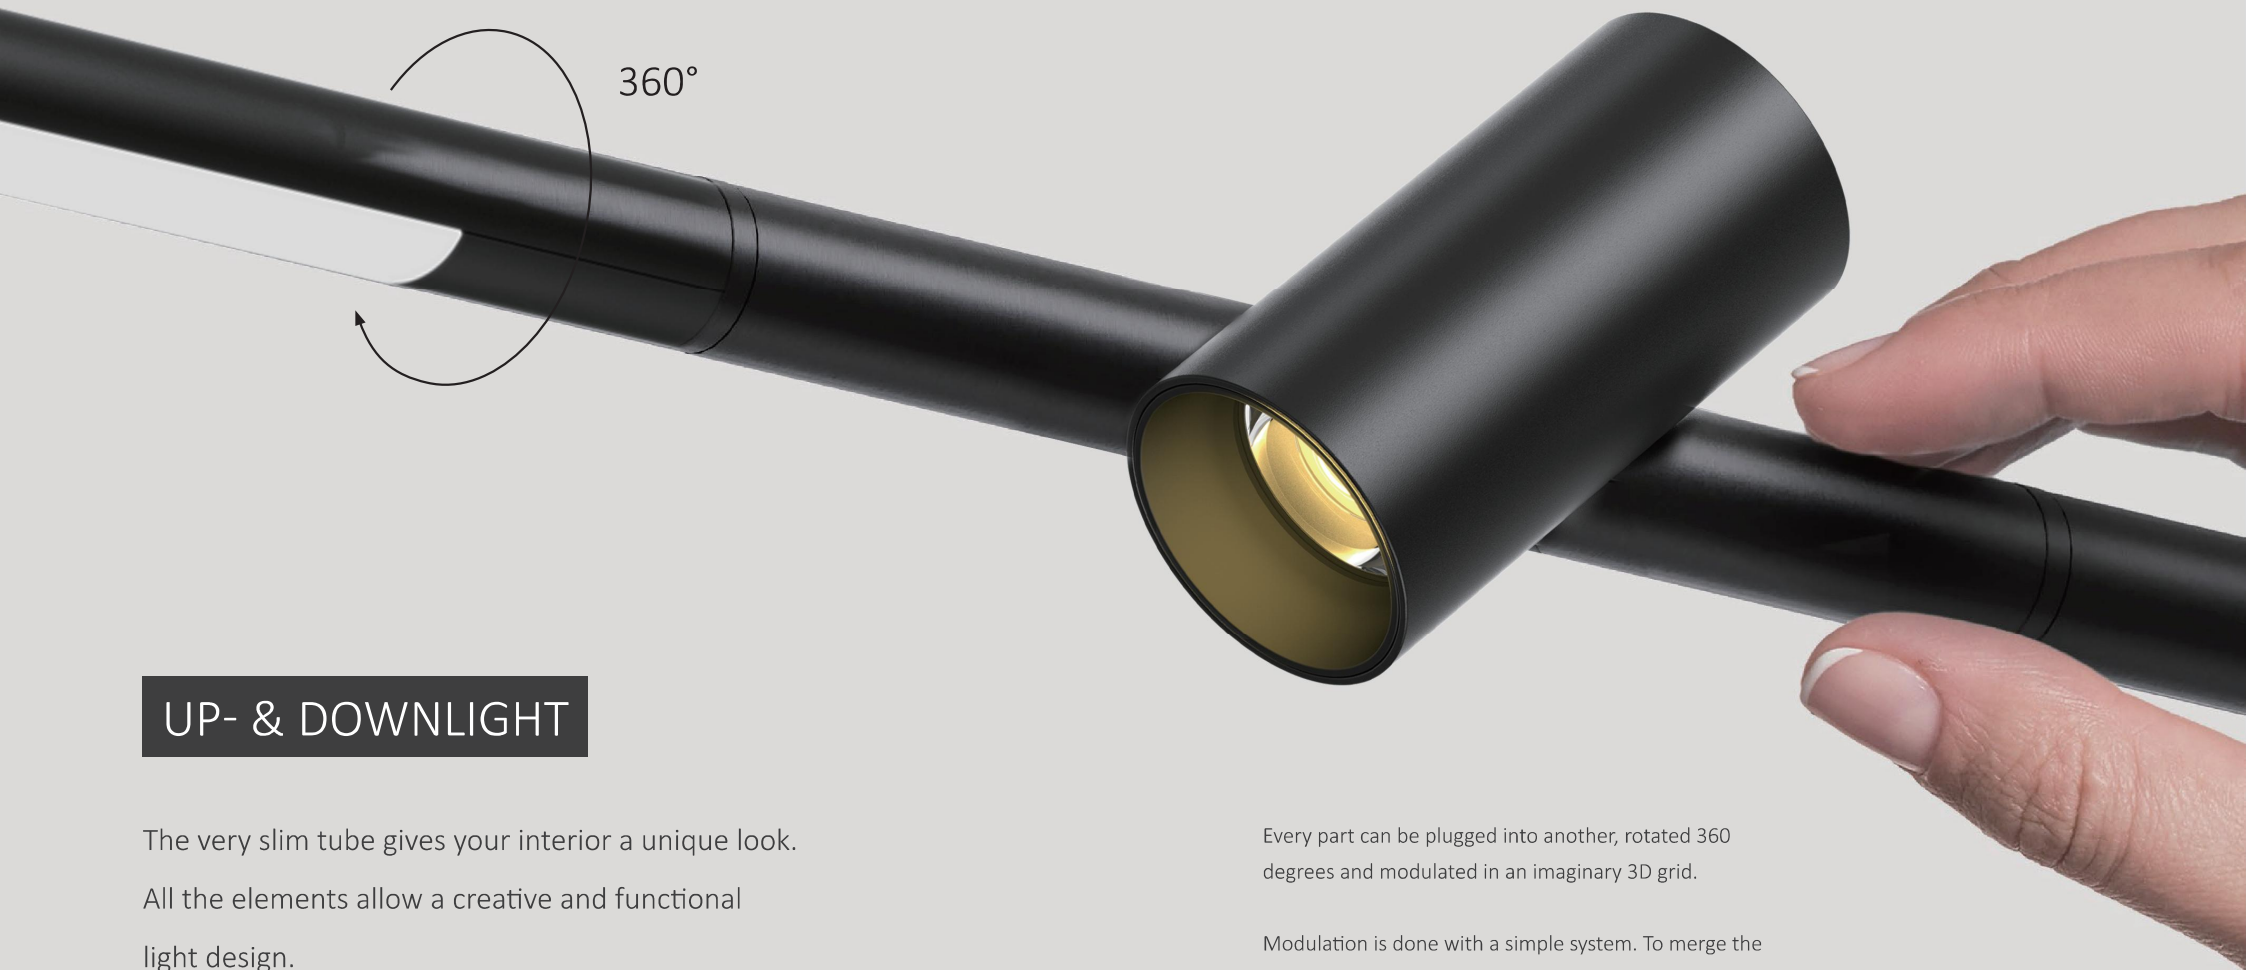

## UP- & DOWNLIGHT

The very slim tube gives your interior a unique look.  
All the elements allow a creative and functional  
light design.

Every part can be plugged into another, rotated 360  
degrees and modulated in an imaginary 3D grid.

Modulation is done with a simple system. To merge the  
parts, no tools are required.

# INFREE SERIES



## PRODUCT SPECIFICATION



◦ CCT  
2700K/3000K/4000K  
5000K/6000K

◦ MATERIAL  
6063 Aluminum

◦ REFLECTOR  
Polycarbonate

◦ LUMEN OUTPUT  
---LM/W

◦ CRI  
≥Ra80/≥Ra90

◦ LIGHT TYPE  
SMD

◦ OPERATING VOLTAGE  
DC48V



◦ SURFACE COLOR




| LIGHT MODEL      | POWER  | BEAM ANGLE | DIMENSIONS |
|------------------|--------|------------|------------|
| INFREE-D35-TF90  | 20-25W | 110°       | φ35*900mm  |
| INFREE-D35-TF120 | 25-30W | 110°       | φ35*1200mm |
| INFREE-D35-TF150 | 35-40W | 110°       | φ35*1500mm |



| LIGHT MODEL       | POWER  | BEAM ANGLE | DIMENSIONS |
|-------------------|--------|------------|------------|
| INFREE-D35-TF90B  | 20-25W | 90°        | φ35*900mm  |
| INFREE-D35-TF120B | 25-30W | 90°        | φ35*1200mm |
| INFREE-D35-TF150B | 35-40W | 90°        | φ35*1500mm |

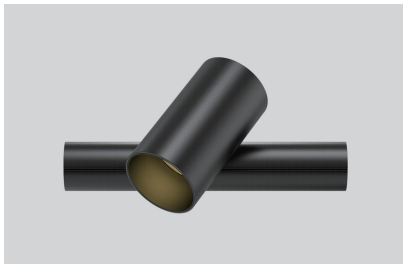


| LIGHT MODEL    | POWER | BEAM ANGLE  | DIMENSIONS |
|----------------|-------|-------------|------------|
| INFREE-D35-S55 | 8-15W | 12°/24°/36° | φ55*200mm  |




| LIGHT MODEL      | POWER  | BEAM ANGLE | DIMENSIONS |
|------------------|--------|------------|------------|
| INFREE-D35-TG90  | 20-25W | 40°/60°    | φ35*900mm  |
| INFREE-D35-TG120 | 25-30W | 40°/60°    | φ35*1200mm |
| INFREE-D35-TG150 | 35-40W | 40°/60°    | φ35*1500mm |



| LIGHT MODEL       | POWER  | BEAM ANGLE | DIMENSIONS |
|-------------------|--------|------------|------------|
| INFREE-D35-TG90A  | 20-25W | 40°/60°    | φ35*900mm  |
| INFREE-D35-TG120A | 25-30W | 40°/60°    | φ35*1200mm |
| INFREE-D35-TG150A | 35-40W | 40°/60°    | φ35*1500mm |



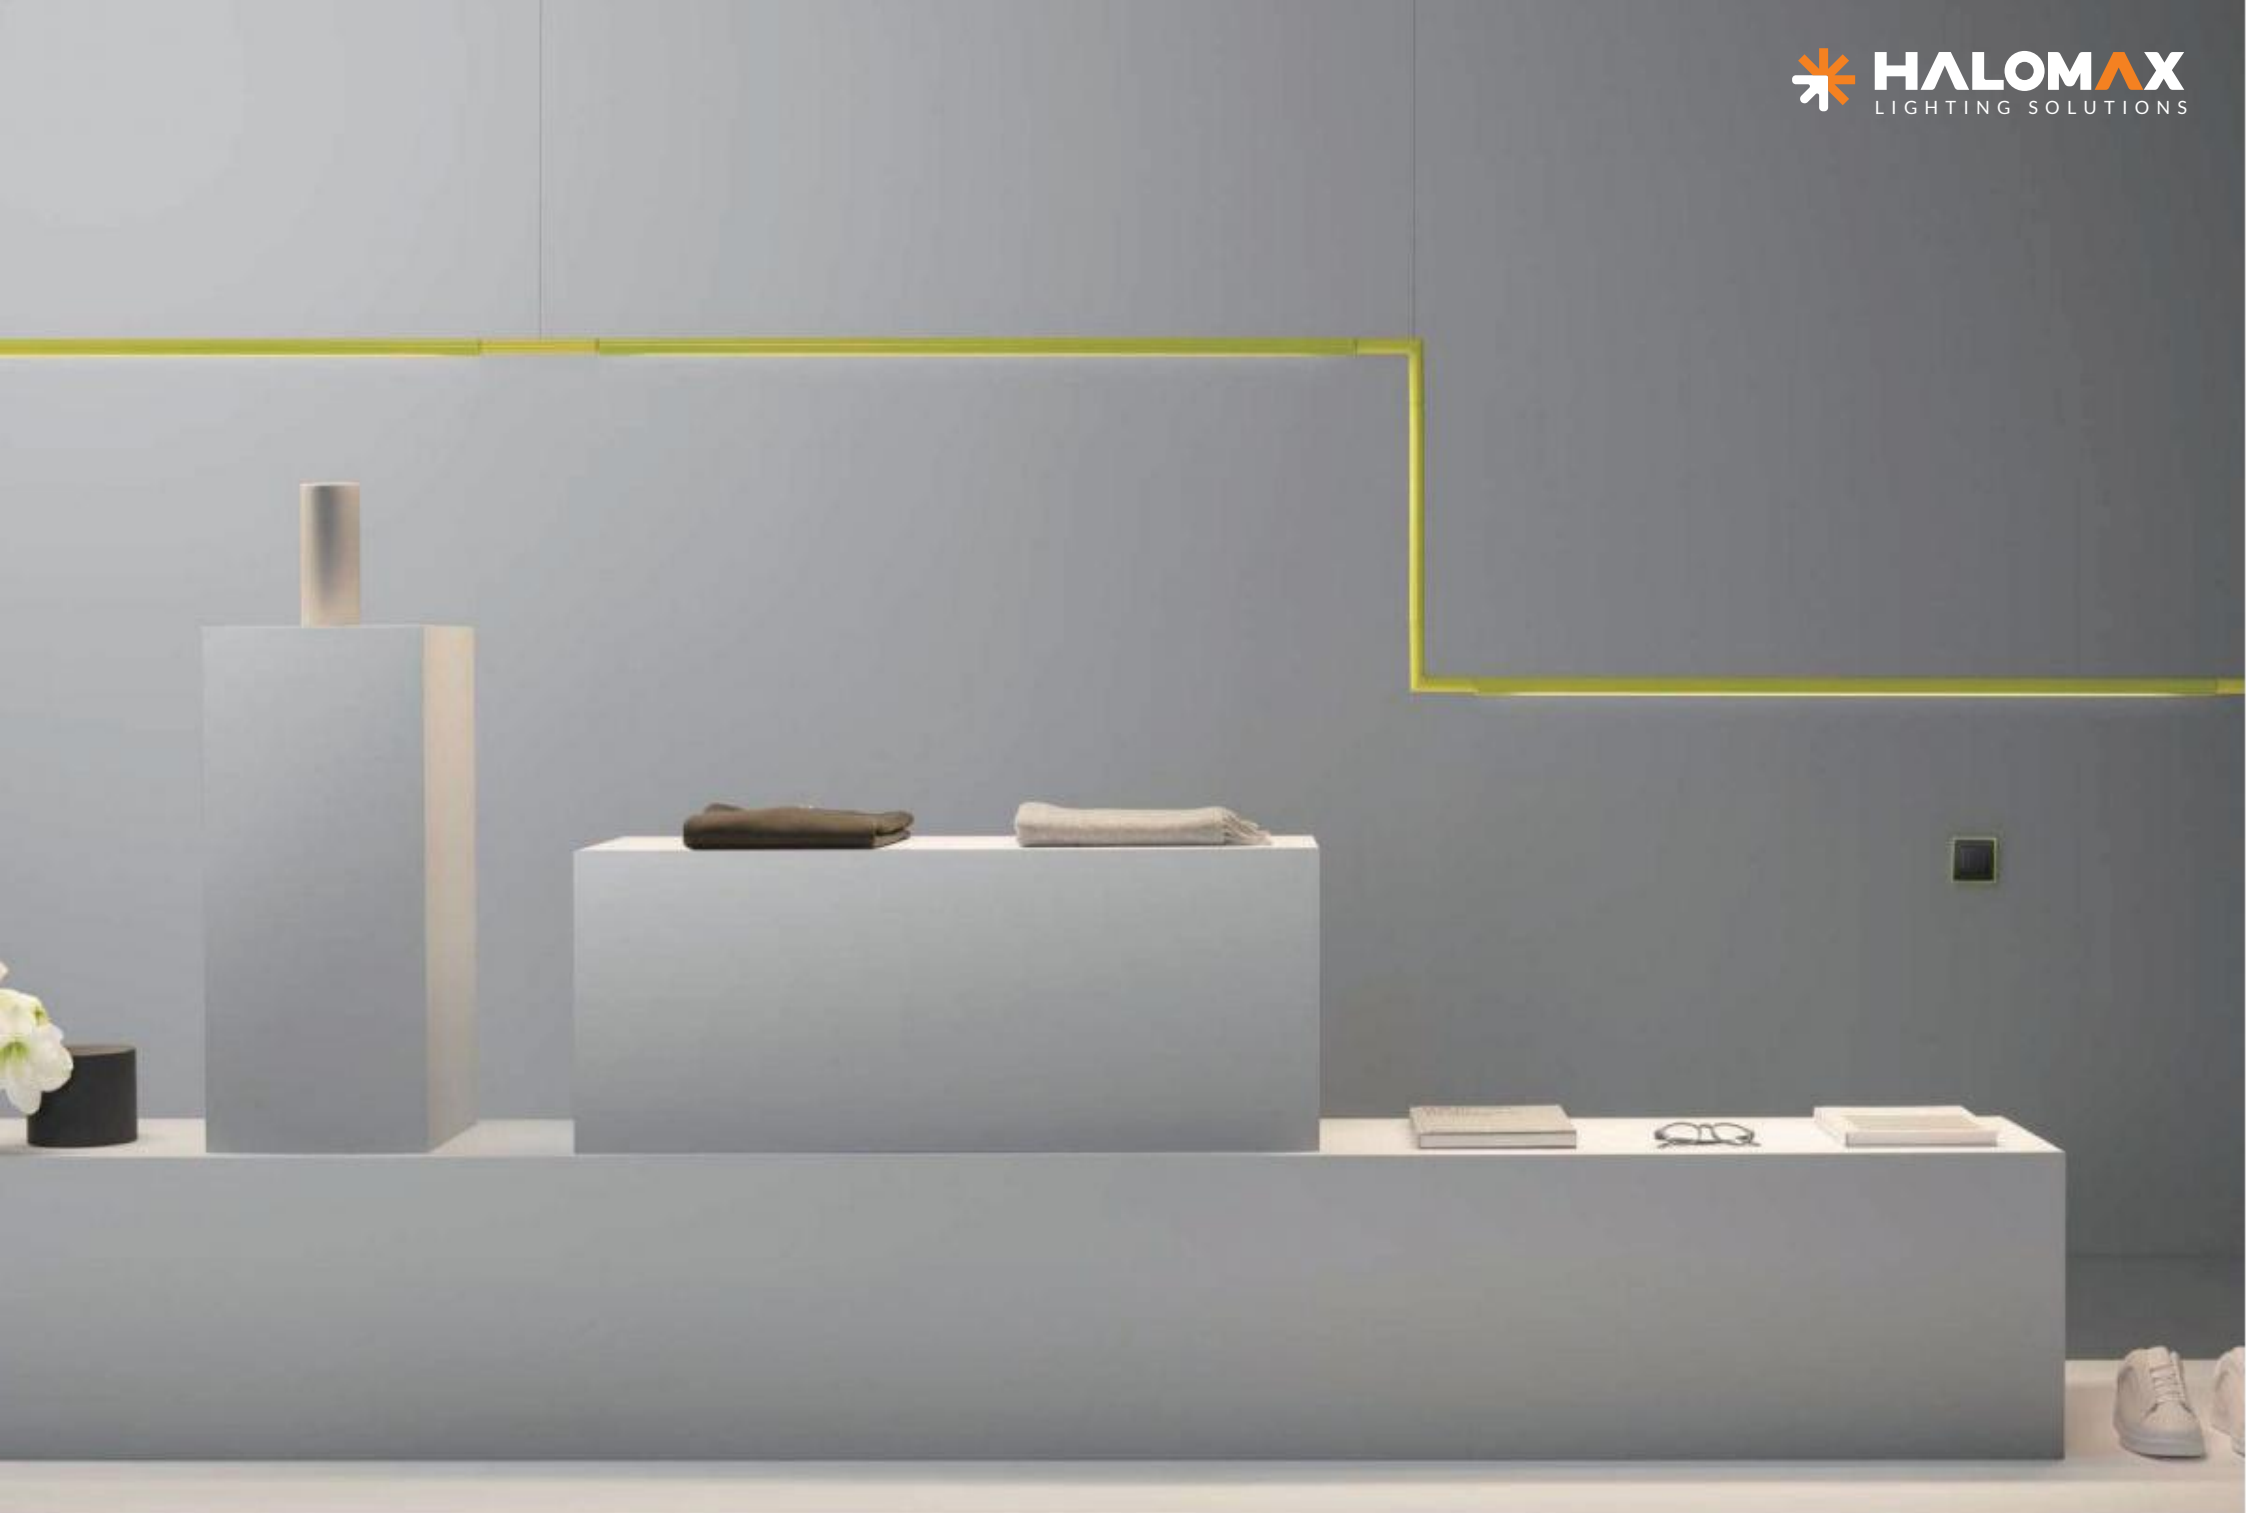



[www.halomax.co.in](http://www.halomax.co.in)