


EDIN



EDIN



EDIN

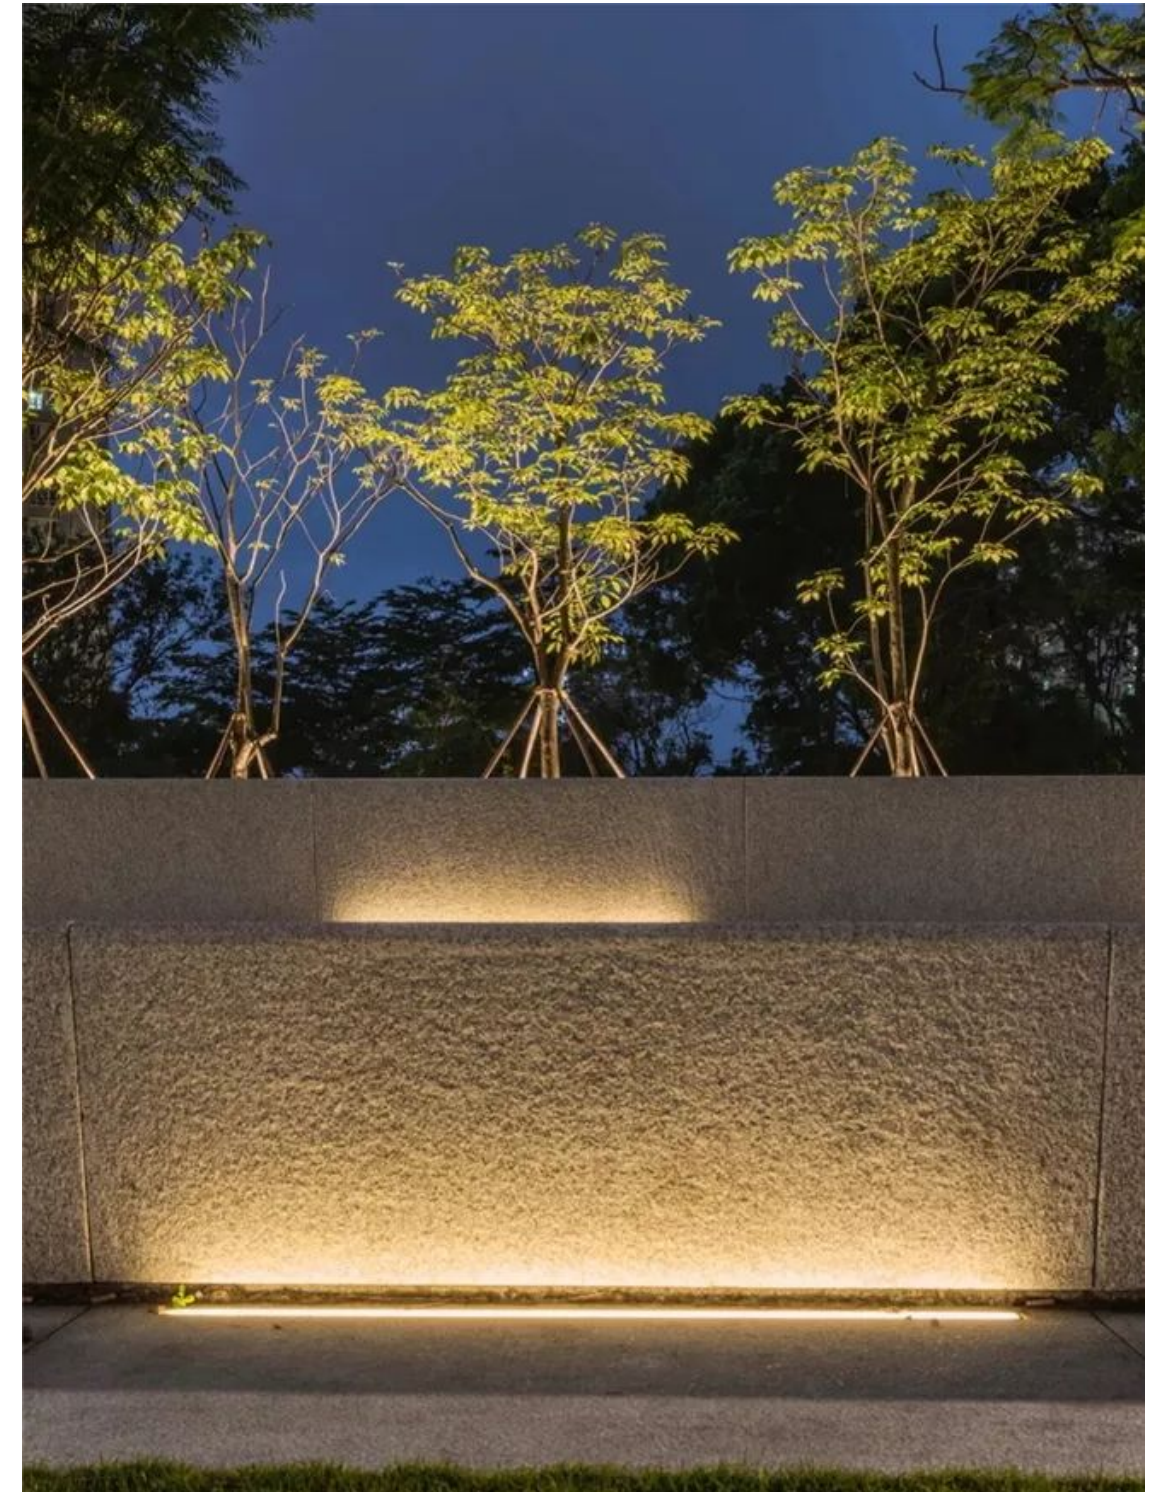







WP02AL1



WP03AL1




WP04AL4



WP02AL3




WP03AL2



WP04AL2




WP02AL4




WP03AL3



WP04AL3



WP10AL2

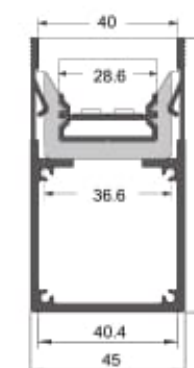

WP10AL1



EDIN

WP02AL1 (AP0501AL1) IP67 LED Profile




Part No.	DescrIption	Picture	Part No.	DescrIption	Picture
1.05.005.0014 (1m) 1.05.005.0015 (2m) 1.05.005.0016 (3m)	Aluminum profile		1.02.04.05.0014 (with hole) 1.02.04.05.0015 (w/o hole)	End cap PC white	
1.16.005.0040 (1m) 1.16.005.0041 (2m) 1.16.005.0042 (3m)	PMMA one time extrusion profile		1.05.005.0040 1m 1.05.005.0041 2m 1.05.005.0042 3m	Aluminum plate	
			1.11.01.0079	EPOXY ADHESIVE	

IP67 LED Profile
Dimensions: W20.2*H16.2*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 10W/meter
120pcs LED per meter
Color Temperature: 2400-6500K
CRI:≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67
Working Temperature:-40°C~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

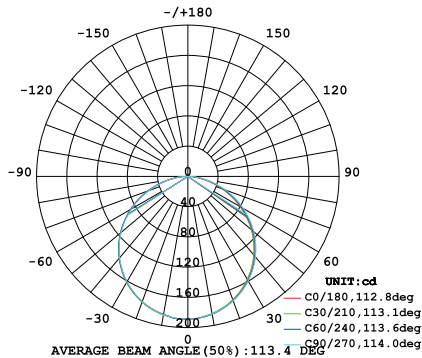

WP02AL3 (AP0501AL3) IP67 LED Profile



Part No.	DescrIption	Picture	Part No.	DescrIption	Picture
1.05.005.0206 (1m) 1.05.005.0207 (2m) 1.05.005.0208 (3m)	Aluminum profile		1.02.04.05.0014 (with hole) 1.02.04.05.0015 (w/o hole)	End cap PC white	
1.16.005.0040 (1m) 1.16.005.0041 (2m) 1.16.005.0042 (3m)	PMMA one time extrusion profile		1.01.04.05.0001 1.01.05.0356 (M2.6*10)	End cap Self-tapping screws	
			1.05.005.0040 1m 1.05.005.0041 2m 1.05.005.0042 3m	Aluminum plate	



1.11.01.0079 EPOXY ADHESIVE



IP67 LED Profile
Dimensions: W36.4*H35*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 10W/meter
120pcs LED per meter
Color Temperature: 2400-6500K
CRI:≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67
Working Temperature:-40°C~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool


suit for class 2 power unit, maximum connected power not more than 100W

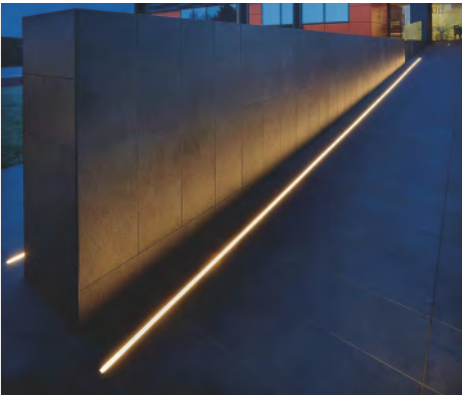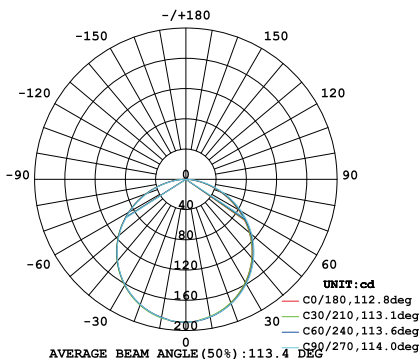

WP02AL4 (AP0501AL4) IP67 LED Profile



Part No.	DescrIption	Picture	Part No.	DescrIption	Picture
1.05.005.0280 (1m) 1.05.005.0281 (2m) 1.05.005.0282 (3m)	Aluminum profile		1.05.005.0040 1m 1.05.005.0041 2m 1.05.005.0042 3m	Aluminum plate	
1.16.005.0040 (1m) 1.16.005.0041 (2m) 1.16.005.0042 (3m)	PMMA one time extrusion profile		1.11.01.0079	EPOXY ADHESIVE	
1.02.04.05.0014 (with hole) 1.02.04.05.0015 (w/o hole)	End cap PC white		1.01.04.05.0015	End cap	
			1.01.05.0356 (M2.6*10)	Self-tapping screws	

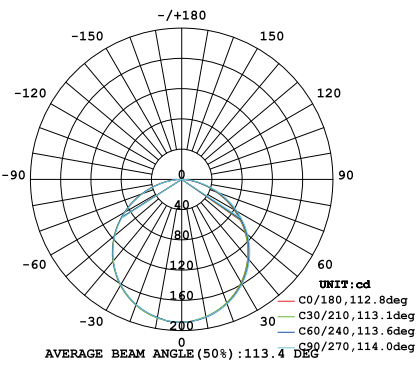

IP67 LED Profile
Dimensions: W20.4*H29.8*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 10W/meter
120pcs LED per meter
Color Temperature: 2400-6500K
CRI:≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67
Working Temperature:-40℃~+45
Fire rating:HB


Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W



WP03AL1 (AP0502AL1) IP67 LED Profile




Part No.	DescriPtion	Picture	Part No.	DescriPtion	Picture
1.05.015.0014 (1m) 1.05.015.0015 (2m) 1.05.015.0016 (3m)	Aluminum profile		1.02.04.15.0019 (with hole) 1.02.04.15.0020 (w/o hole)	Frosted end cap	
1.16.005.0056 (1m) 1.16.005.0057 (2m) 1.16.005.0058 (3m)	PMMA one time extrusion profile		1.05.015.0034 1m 1.05.015.0036 2m 1.05.015.0037 3m	Aluminum plate	
			1.11.01.0079	EPOXY ADHESIVE	

IP67/IP68 LED Profile
Dimensions: W24.7*H20.7*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 15W/meter
120pcs LED per meter
Color Temperature: 2400-6500K
CRI:≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67/IP68
Working Temperature:-40°C~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

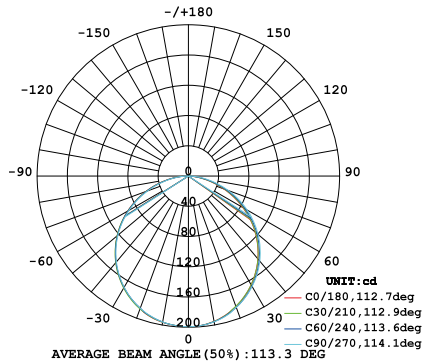

WP03AL2 (AP0502AL2) IP67 LED Profile





Part No.	DescriPtion	Picture	Part No.	DescriPtion	Picture
1.05.015.0051 (1m) 1.05.015.0052 (2m) 1.05.015.0053 (3.05m)	Aluminum profile		1.02.04.15.0019 (with hole) 1.02.04.15.0020 (w/o hole)	Frosted end cap	
1.16.005.0056 (1m) 1.16.005.0057 (2m) 1.16.005.0058 (3m)	PMMA one time extrusion profile		1.01.04.05.0013 1.01.05.0345 (M3*10)	End cap Self-tapping screws	
1.11.01.0079	EPOXY ADHESIVE				
1.05.015.0034 1m 1.05.015.0036 2m 1.05.015.0037 3m	Aluminum plate				

IP67/IP68 LED Profile
Dimensions: W40.9*H44*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 15W/meter
120pcs LED per meter
Color Temperature: 2400-6500K
CRI:≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67/IP68
Working Temperature:-40°C~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

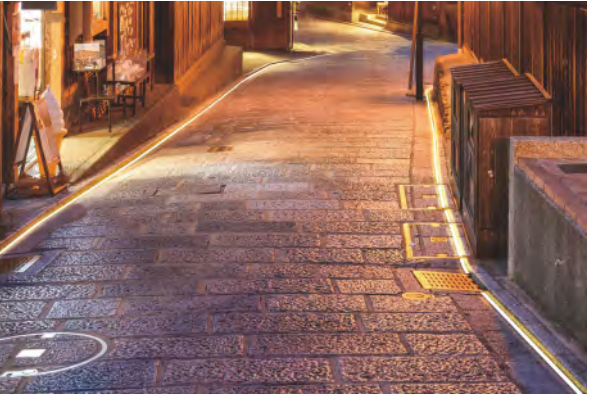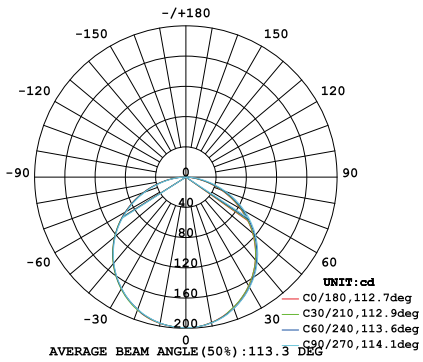

WP03AL3 (AP0502AL3) IP67 LED Profile




Part No.	DescrIPTion	Picture	Part No.	DescrIPTion	Picture
1.05.015.0300 (1m) 1.05.015.0301 (2m) 1.05.015.0302 (3m)	Aluminum profile		1.02.04.15.0019 (with hole) 1.02.04.15.0020 (w/o hole)	Frosted end cap	
1.16.005.0056 (1m) 1.16.005.0057 (2m) 1.16.005.0058 (3m)	PMMA one time extrusion profile		1.05.015.0034 1m 1.05.015.0036 2m 1.05.015.0037 3m	Aluminum plate	
1.11.01.0079	EPOXY ADHESIVE		1.01.04.05.0016 1.01.05.0345 (M3*10)	End cap Self-tapping screws	



IP67/IP68 LED Profile
Dimensions: W24.9*H34.2*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 15W/meter
120pcs LED per meter
Color Temperature: 2400-6500K
CRI: ≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67/IP68
Working Temperature:-40℃~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

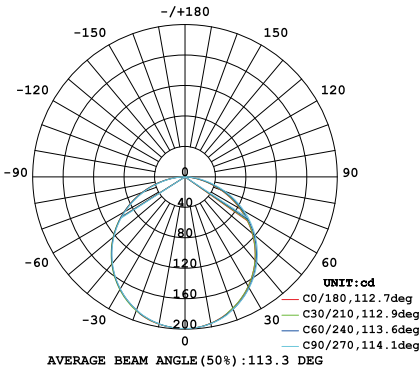

WP04AL4 (AP0503AL4) IP67 LED Profile




Part No.	DescriPtion	Picture	Part No.	DescriPtion	Picture
1.05.005.0265 (1m) 1.05.005.0266 (2m) 1.05.005.0267 (3m)	Aluminum profile		1.05.005.0050 1m 1.05.005.0051 2m 1.05.005.0052 3m	Aluminum plate	
1.16.005.0045 (1m) 1.16.005.0046 (2m) 1.16.005.0047 (3m)	PMMA one time extrusion profile		1.11.01.0079	EPOXY ADHESIVE	
1.05.005.0190	Aluminum plate		1.02.04.05.0042 (with hole) 1.02.04.05.0043 (w/o hole)	Frosted end cap	

IP67/IP68 LED Profile
Dimensions: W30.6*H30*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 20W/meter
240pcs LED per meter
Color Temperature: 2400-6500K
CRI: ≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67/IP68
Working Temperature:-40°C~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

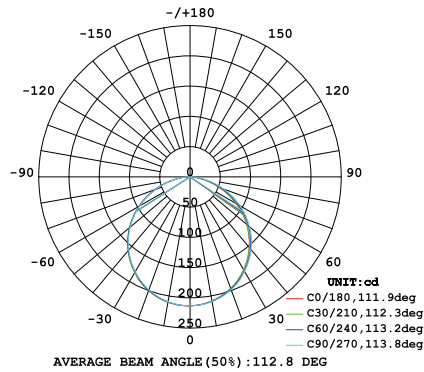

WP04AL2 (AP0503AL2) IP67 LED Profile




Part No.	DescriPtion	Picture	Part No.	DescriPtion	Picture
1.05.005.0181 (1m) 1.05.005.0182 (2m) 1.05.005.0197 (3m)	Aluminum profile		1.05.005.0190	Aluminum plate	
1.16.005.0045 (1m) 1.16.005.0046 (2m) 1.16.005.0047 (3m)	PMMA one time extrusion profile		1.05.005.0050 1m 1.05.005.0051 2m 1.05.005.0052 3m	Aluminum plate	
1.01.04.05.0014	End cap		1.11.01.0079	EPOXY ADHESIVE	
1.01.05.0345 (M3*10)	Self-tapping screws				
1.02.04.05.0042 (with hole) 1.02.04.05.0043 (w/o hole)	Frosted end cap				

IP67/IP68 LED Profile
Dimensions: W55.6*H63.7*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 20W/meter
240pcs LED per meter
Color Temperature: 2400-6500K
CRI: ≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67/IP68
Working Temperature:-40°C~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

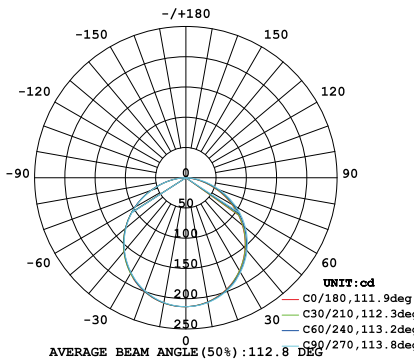

WP04AL3 (AP0503AL3) IP67 LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.005.0251 (1m) 1.05.005.0252 (2m) 1.05.005.0253 (3m)	Aluminum profile		1.05.005.0050 1m 1.05.005.0051 2m 1.05.005.0052 3m	Aluminum plate	
1.16.005.0045 (1m) 1.16.005.0046 (2m) 1.16.005.0047 (3m)	PMMA one time extrusion profile		1.11.01.0079	EPOXY ADHESIVE	
1.05.005.0195 (1m) 1.05.005.0194 (2m)	Aluminum plate		1.02.04.05.0042 (with hole) 1.02.04.05.0043 (w/o hole)	Frosted end cap	
1.01.04.05.0017	End cap				
1.01.05.0345 (M3*10)	Self-tapping screws				

IP67/IP68 LED Profile
Dimensions: W30.6*H45*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 20W/meter
240pcs LED per meter
Color Temperature: 2400-6500K
CRI: ≥80
(CRI more than 80 is available on request)
Beam Angle: 110°
Cable length: 200mm
(Option : Cable come from the side,from the end,from the bottom)
IP rating: IP67/IP68
Working Temperature:-40℃~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

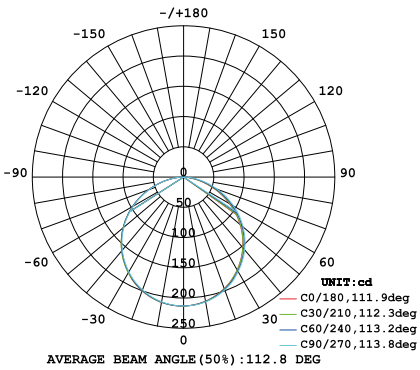

WP10AL2-NEW IP67 LED Profile




Part No.	DesclPtion	Picture	Part No.	DesclPtion	Picture
1.05.060.0022 (1M) 1.05.060.0021 (2M)	Aluminum profile		1.05.060.0030 (1M) 1.05.060.0031 (2M)	Aluminum plate	
1.16.060.0005 (3.2M)	PMMA one time extrusion profile		1.02.04.60.0006	Frosted end cap	
1.01.04.60.0002 1.01.05.0345 (M3*10)	End cap Self-tapping screws				

IP67/IP68 LED Profile
Dimensions: W45*H45*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power :30W/meter
240pcs LED per meter
Color Temperature: 2400-6500K
CRI: ≥80
(CRI more than 80 is available on request)
Beam Angle: 120°
Cable length: 200mm
(Option : Cable come from the end,from the bottom)
IP rating: IP67/IP68
Working Temperature:-40°C~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

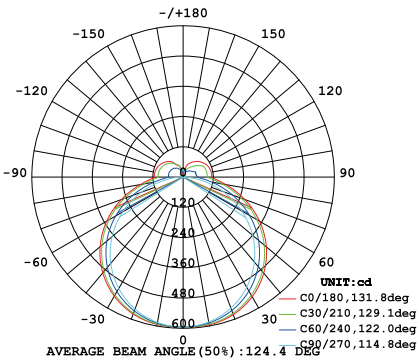

WP10AL1-NEW IP67 LED profile




Part No.	DesclPtion	Picture	Part No.	DesclPtion	Picture
1.05.060.0017 (1M) 1.05.060.0018 (2M) 1.05.060.0019 (3.02M)	Aluminum profile		1.05.060.0030 (1M) 1.05.060.0031 (2M)	Aluminum plate	
1.16.060.0005 (3.2M)	PMMA one time extrusion profile		1.02.04.60.0006	Frosted end cap	
1.01.04.60.0001 1.01.05.0345 (M3*10)	End cap Self-tapping screws				

IP67/IP68 LED Profile
Dimensions: W45*H80*L1000mm
(Customized length is available on request.)
Input voltage:24V DC
Power: 30W/meter
240pcs LED per meter
Color Temperature: 2400-6500K
CRI: ≥80
(CRI more than 80 is available on request)
Beam Angle: 120°
Cable length: 200mm
(Option : Cable come from the end,from the bottom)
IP rating: IP67/IP68
Working Temperature:-40°C~+45
Fire rating:HB

Application: suit for indoor or outdoor light decoration
can be used in swimming pool

suit for class 2 power unit, maximum connected power not more than 100W

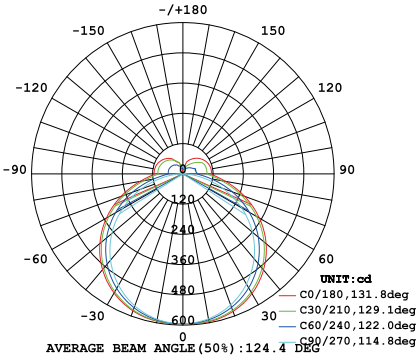



www.halomax.co.in