


VERSAGLOW

VersaGlow Series -1070 Series

- Die-casting Aluminum housing, Extruded Aluminum pole
- Injection PC diffuser/Clear Tempered glass/PMMA
- Applications: Parks, Squares, Streets, Buildings



POLE LIGHT

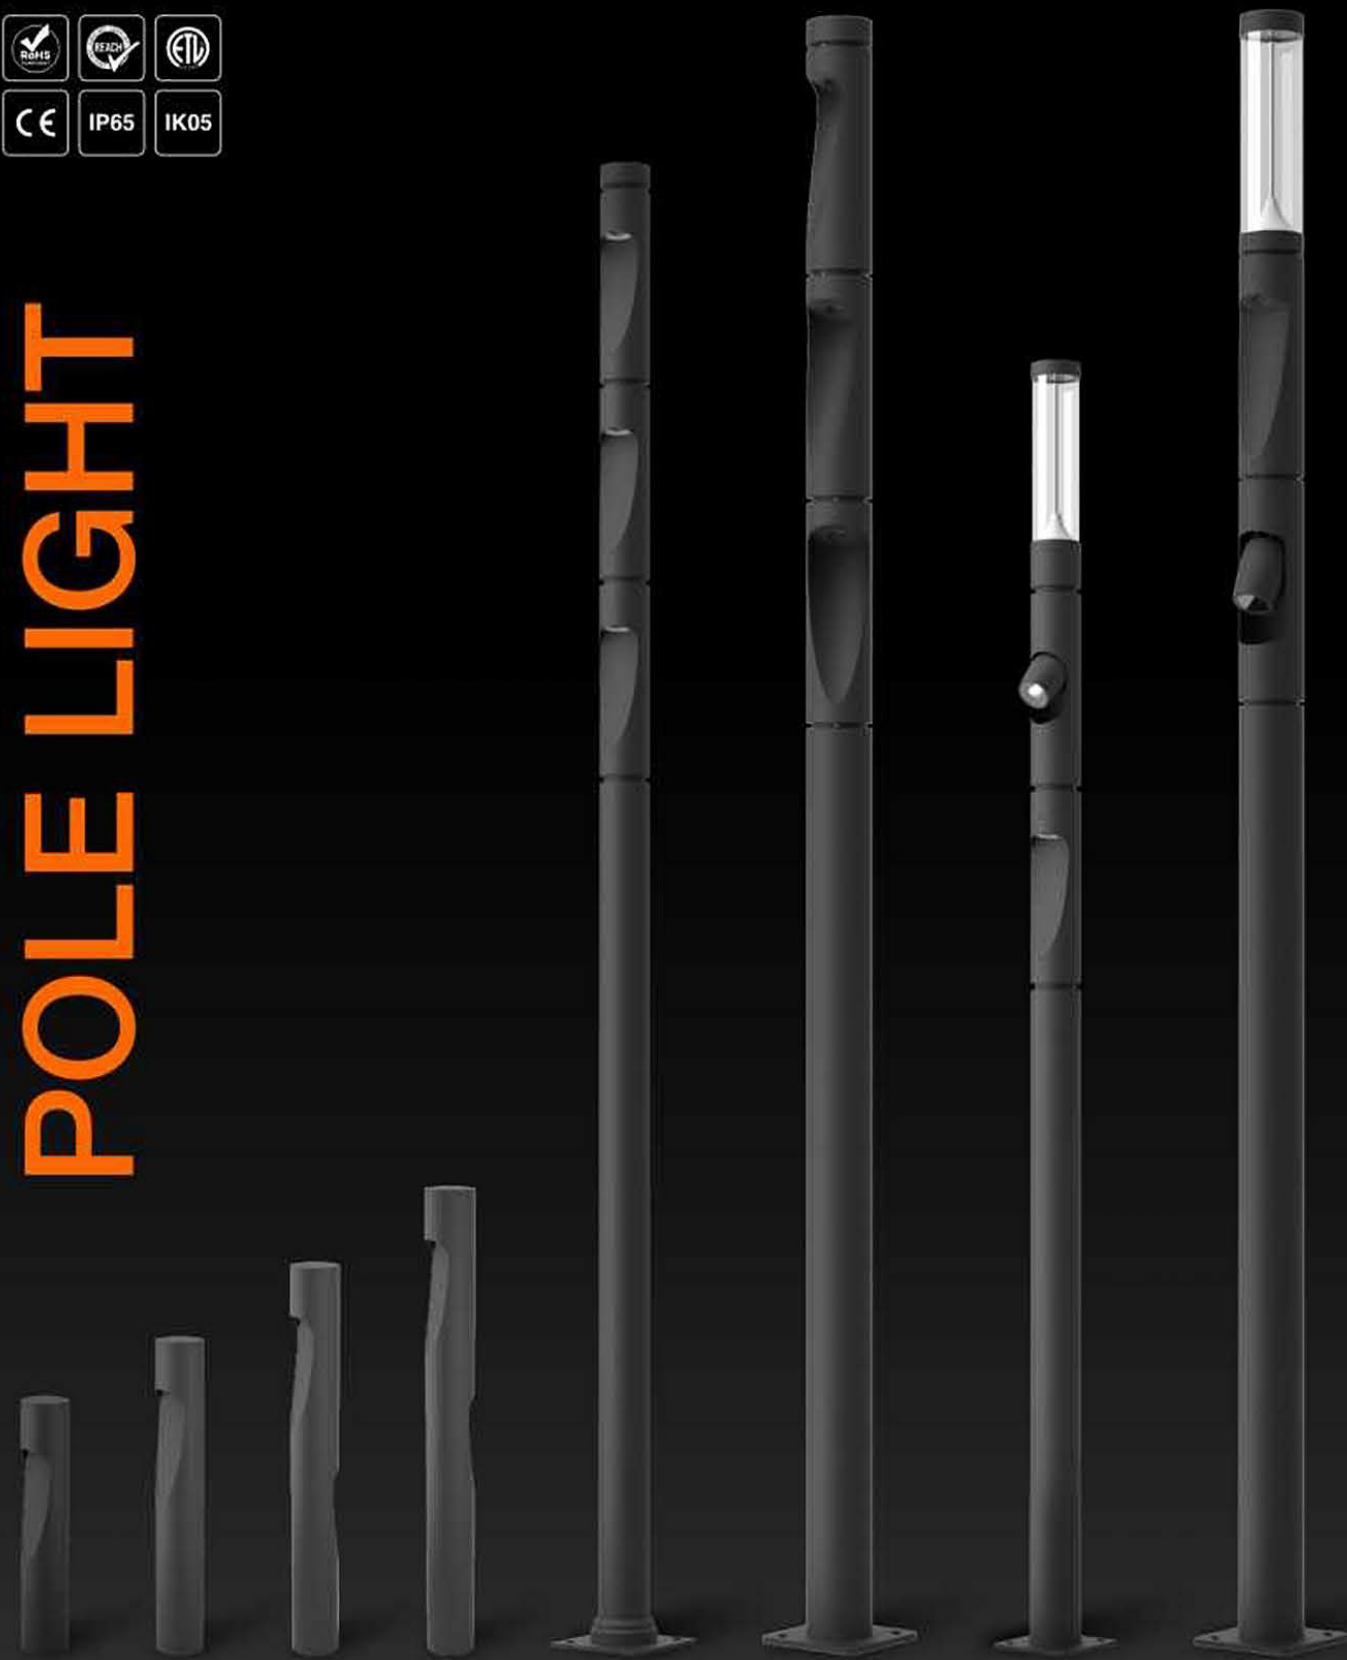

Replaceable Structure


Proprietary quick-release technology-no complex tools required for component replacement

Supports independent upgrades of light source/cover reducing long-term maintenance costs



360° Free Rotation

Horizontal rotation adjustment for precise lighting direction control

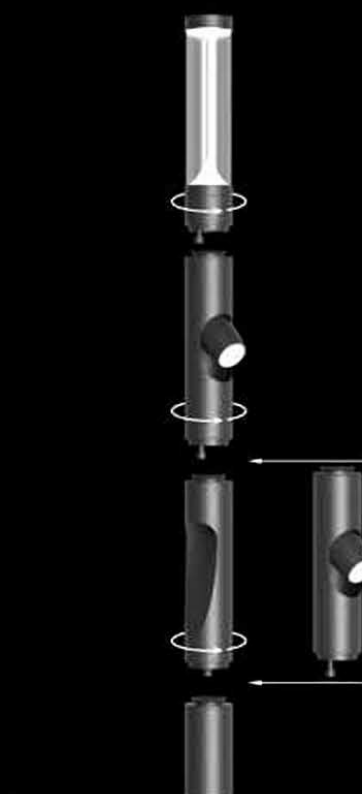


CUSTOMIZABLE HEIGHT

Segmented structure for flexible extension




360° Free Rotation

Horizontal rotation adjustment for precise lighting direction control

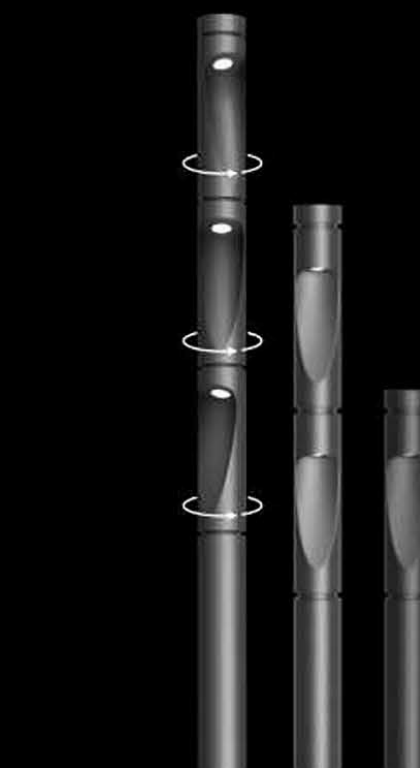


Description

- Die-coating Aluminum housing, Extruded Aluminum pole
- Clear Tempered glass/Injection PC diffuser
- Applications: Parks, Squares, Streets, Buildings




Regular

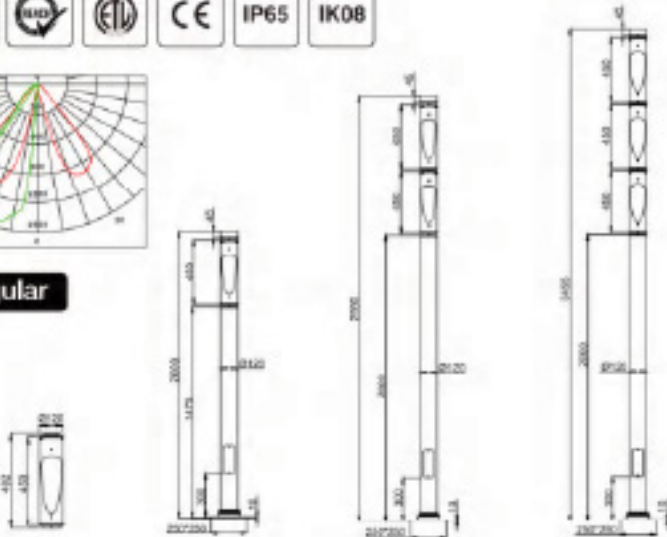


Code	Power	Led	CRI	Angle	Luminous
1070 V3	3*15W	CREE CXA1512	≥80	90°	3*550Lm
	3*20W	CREE CXA1512	≥80	90°	3*690Lm
	3*15W	COB TG 17S	≥80	90°	3*660Lm
	3*20W	COB TG 17S	≥80	90°	3*745.5Lm

Large

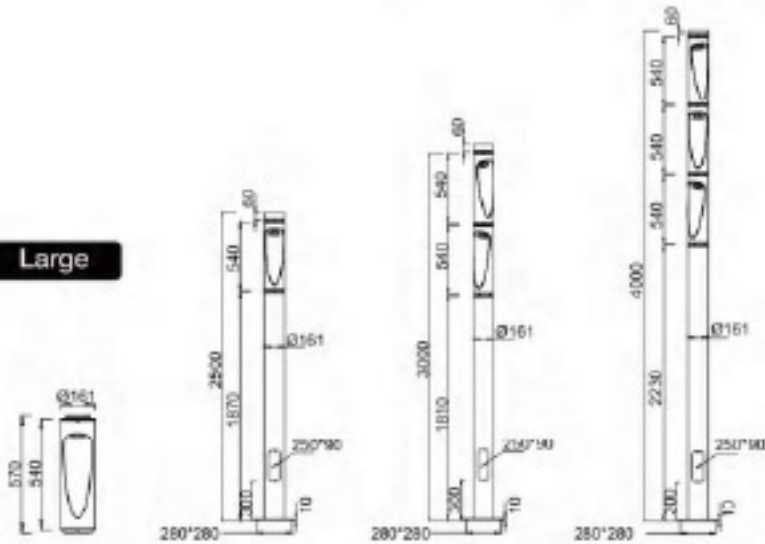

Code	Power	Led	CRI	Angle	Luminous
1070 VL3	3*30W	CREE CXA1512	≥80	90°	3*5232Lm
	3*40W	COB TG 17S	≥80	90°	3*6894Lm
	 3*24/32/40W	COB TG 17S	≥80	90°	3*4335/5581/6894Lm

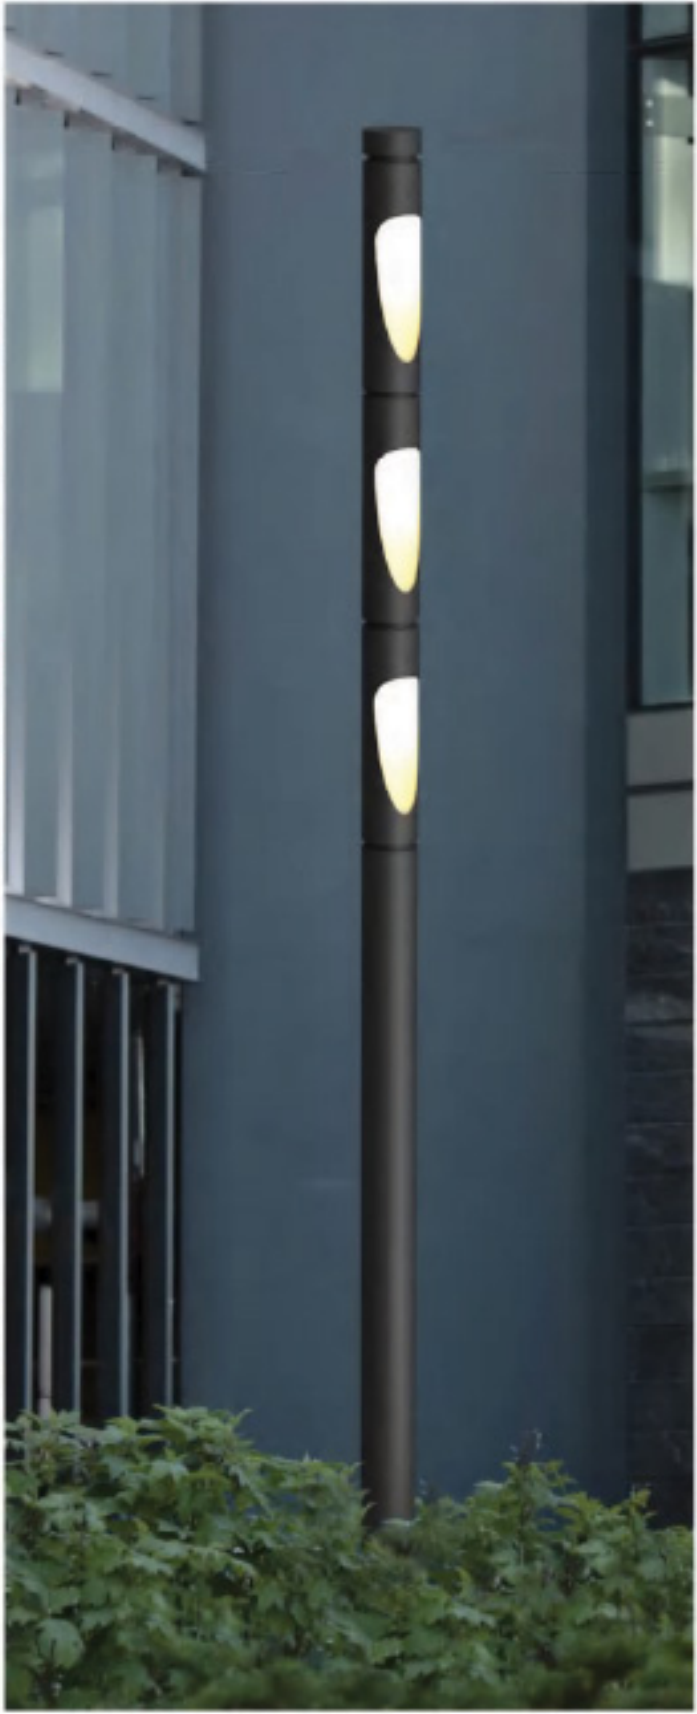


1070 V3

1070 VL3


Description

NEW

- Die-coating Aluminum housing, Extruded Aluminum pole
- PMMA diffuser /Clear Tempered glass/Injection PC diffuser
- Applications: Parks, Squares, Streets, Buildings

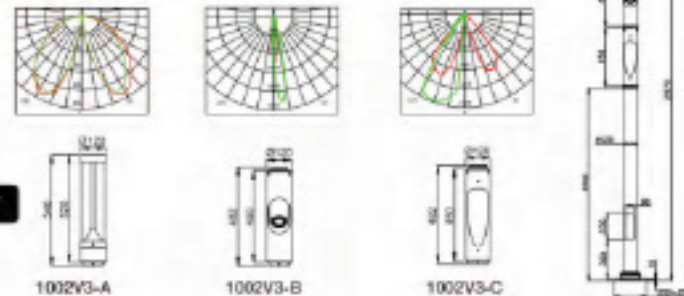

Code	Power	Led	CRI	Angle	Luminous
1002 V3-A	15W	Lumileds 3030	≥80	120°	1198Lm
3 CCT	15W	Lumileds 3030	≥80	120°	1195Lm
1002 V3-B	15W	CREE CXA1512	≥80	15°/24°/36°/60°	1165Lm
3 CCT	15W	COB TG 18S	≥80	15°/24°/36°/60°	1143Lm
1002 V3-C	15W	CREE CXA1512	≥80	90°	550Lm
	20W	CREE CXA1512	≥80	90°	690Lm
3 CCT	15W	COB TG 17S	≥80	90°	580Lm
	20W	COB TG 17S	≥80	90°	745.5Lm

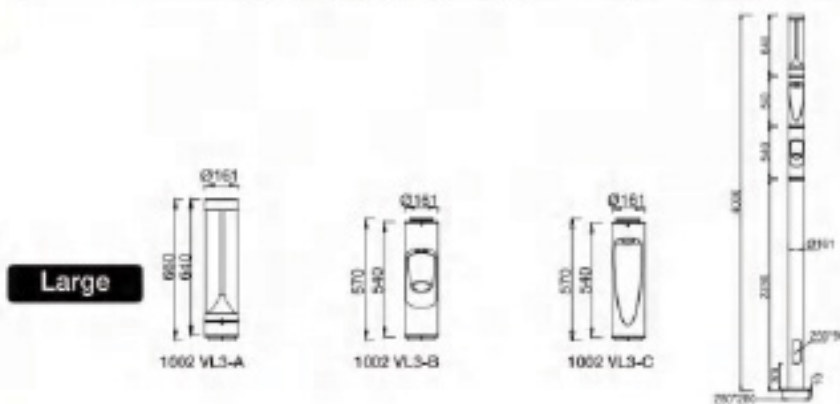

Code	Power	Led	CRI	Angle	Luminous
1002 VL3-A	30W	Lumileds3030	≥80	120°	2344Lm
	50W	Lumileds3030	≥80	120°	3681Lm
3 CCT & 4000K selectable	30/40/50W	Lumileds3030	≥80	120°	2344/3184/3981Lm
1002 VL3-B	20W	CREE CXA1816	≥80	15°/24°/36°/60°	1305Lm
	25W	CREE CXA1816	≥80	15°/24°/36°/60°	1612Lm
3 CCT & 4000K selectable	10/18/25W	COB TG 18S	≥80	15°/24°/36°/60°	689/1188/1612Lm
1002 VL3-C	30W	CREE CXA2530	≥80	90°	1744Lm
	40W	COB TG 17S	≥80	90°	2298Lm
3 CCT & 4000K selectable	24/32/40W	COB TG 17S	≥80	90°	1372/1828/2298Lm



